

IMPORTANT INFORMATION

IMPORTANT! Read this information before proceeding. It is the user's responsibility to take the following precautions at all times.

- Always stake or weight down your shelter. Do not use in any potentially windy or rainy weather.

Wind and rain can damage the E-Z UP® Instant Shelter® and may also result in injury to you or others. Therefore, do not rely on shelter for protection in heavy or prolonged rain storms.

- The E-Z UP® Instant Shelter® is designed as a temporary shelter. Do not leave up for extended periods.
- Use caution when handling the E-Z UP® folding frame. Avoid pinching hands or fingers as frame opens or closes.
- Do not use shelter in a lightning storm.
- Do not leave your E-Z UP® Instant Shelter® unattended.
- Keep all flame and heat sources away from fabric top. Do not build fires within shelter enclosure.

Fire resistant - meets CPAI-84 requirements.

CARE AND MAINTENANCE

For long lasting durability and the best possible protection for your E-Z UP® Instant Shelter®, follow these E-Z care and maintenance instructions:

- Use a mild soap (not detergent) and plenty of water for top cleaning.
- Let the E-Z UP® top and frame dry completely before closing or storing to avoid mildew.
- Frame will operate and look better if occasionally wiped with silicone spray, especially before and after use in damp conditions. Remove excess silicone residue before applying top.
- Use a seam sealer if top leaks or drips water. Available at most sporting goods and hardware stores.
- Slightly tighten bolts if frame becomes loose.

Covered under one or more of the following patents: 4,607,656; 4,924,896; 5,244,001; 5,421,356; 5,485,863; 5,490,533; 5,511,572; 5,632,292; 5,632,293; 5,794,546; 5,797,412; 5,813,425; 5,865,127; 5,921,260; 5,934,301; 6,041,800; 6,070,604; 6,076,312; 6,129,102; 6,138,702; 6,192,910; 6,230,729; 6,240,940; 6,431,193; 6,439,251; 9,570,439; 94/2354; 91461; 132167; 95/0693; 95/6140; 95/6141; 84107895; 684,976; 2123096; 190486; 289754; 215344; 701077; 2128935; 2949648; 48648; DE 695 10 919 12; WO96/03561. International Design Registration No. DM/009515 Benelux Design Registration No. 16959-04. Other US and foreign patents pending. © Copyright 2007 International E-Z UP, Inc. USA. All rights reserved.

OM.ENDEAVORRev1.Pro1.0607



PRODUCT WARRANTY

INTERNATIONAL E-Z UP, INC., manufacturer of the E-Z UP® Instant Shelter®, warrants to the original purchaser who provides a dated sales receipt, from an Authorized Dealer, each part of the E-Z UP® Instant Shelter® to be free from defects in material or workmanship for a period of **TWO YEARS** after the date of original purchase. This warranty applies only for normal and expected uses, as determined by the manufacturer. INTERNATIONAL E-Z UP, INC.'s obligation and liability under this warranty is limited to the repair or replacement (at its option) of the product or its parts, after its own review and examination.

RETURN ADVISORY - Before returning any part or product to INTERNATIONAL E-Z UP, INC. or its designated representative, please phone or write to obtain specific return shipping instructions. All shipping costs must be prepaid. INTERNATIONAL E-Z UP, INC. is not responsible for products damaged in transit.

CONDITIONS - This warranty shall be void as to any product which has been altered or modified in any manner. This warranty does not apply to damages caused by wind, rain, or other forces of nature, not to accidental or deliberated damage of the product, nor to use of the product that does not conform with the product instructions.

This warranty is provided in lieu of all other warranties, expressed or implied.

www.ezup.com

We Make Life E-Z!
INTERNATIONAL E-Z UP, INC.

1601 Iowa Avenue, Riverside, California 92507

(951) 781-0843 • Fax (951) 781-0586

www.ezup.com

Customer Service Hot Line

800-45 SHADE

4 5 7 4 2 3 3

OWNER'S MANUAL

E-Z UP®
INSTANT SHELTER®



"Sets Up in Seconds!"™

Endeavor™

10' x 10'

With proper care, this shelter will deliver years of trouble free service. Please take a few minutes to read the following use and care instructions. If you have any questions or require assistance, please call.



Customer Service Hot Line

800-45 SHADE

4 5 7 4 2 3 3

www.ezup.com

WHAT'S IN THE BOX


- 1 10' x 10' Frame Fully Assembled
 - 1 Dura-Last® Top
 - 4 Piece Stake Set
 - 1 Roller Bag
- Optional Accessories:
- 4 Dura-Lon™ Zippered Sidewalls
 - 1 10' Attached Awning

HOW TO SET UP


Please read each step before you attempt to set up. Save these instructions for future reference.

Note: First Time Top Attachment Is Required.

Top and frame are shipped unattached to avoid damage. This first time set up takes longer than future set ups. Once top is attached to frame, set up and take down are easily accomplished within seconds.




1. Place your E-Z UP® frame in the center of area to be sheltered. With partner on opposite side, grasp two outer legs, slightly lift off ground and step backwards, stopping at full arms' length - approximately 3/4 its total size.




2.* Gently unfold the fabric top and place it over the open frame. Ensure the vents in the top are located on the adjacent side to the Open/Close truss labels. This will ensure correct orientation of the vents.

Note: Custom tops do not include roof vent.




3.* To secure the top, locate the two top attachment nuts on the frame, above the "open and close" truss labels.

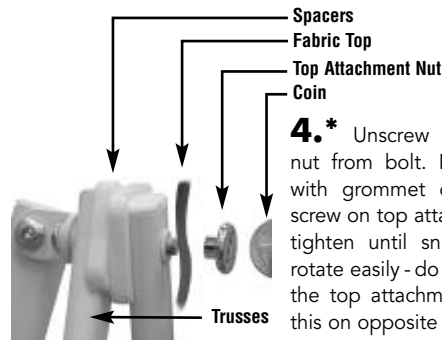

4.* Unscrew top attachment nut from bolt. Place top fabric with grommet over each bolt, screw on top attachment nut and tighten until snug. Top should rotate easily - do not over tighten the top attachment nut. Repeat this on opposite end.




5. With partner on opposite side of shelter, stand across from one another. Grasp the top and bottom of the diamond shaped area of trusses on opposite sides by the "Open" sticker. Lift up and step backwards shaking the shelter until it's fully opened, being careful not to pinch fingers.



6. To engage the slider at each corner, first lift the fabric off of the slider, then with one hand hold the top of the leg while pushing up on the slider with the other hand. The pull pin will engage the hole. Pull down the fabric valance over the slider. Repeat on all four corners.



7. Attach the top to the frame by matching the quick attachment strips on the top with the strips on the frame. Pull the corners down firmly. Push the quick attachment strips firmly together at each corner.




8. Lift two adjacent outer legs up and slide out the inner legs until the snap button locks into the outer leg. Repeat on the opposite legs - making sure to do two legs at a time.

*** Note: Once top is attached, only perform steps 1 and 5 - 8 to set up.**

ROOF VENTS

Note: Roof vents should be opened in windy conditions or for ventilation. Both vents should be opened for full effect.




1. Locate Zippers and unzip roof vent




2. Roll the flap downward. Finally, attach the toggle and loop together to secure.

Note: Custom tops do not include roof vent.


HOW TO TAKE DOWN



1. With partner, slightly lift up two adjacent outer legs, depress snap button and telescope inner legs into outer legs. Repeat on the opposite legs - making sure to do two legs at a time.



2. Release pull pin at each corner by first lifting valance fabric away from slider. With one hand push up on truss near the pull pin, pull the pin out to release.



3. IMPORTANT! Grasp each of the four legs one at a time, shake the trusses up and down vigorously to overcome the heavy duty top resistance to close the frame.



4. Grasp the top and bottom of diamond on diagonally opposite sides by "Close" sticker. Lift the shelter up slightly and shake it while stepping towards your partner until the unit is 3/4 closed. With each partner grasping two outer legs, push frame together to fully close it.

Be careful not to pinch fingers.

5. Place roller bag over the shelter and store away.