

What's In The Box

Please read each step before you attempt to set up. Save these instructions for future reference. Return the Warranty Card within 10 days of purchase.


- 1 8' x 12' Dome™ Frame
- 1 Carry Bag
- 1 Dome™ Top (with attachment hooks)
- 4 Piece Stake Kit

How To Set Up


Important: The first time you set up your Dome™ the top must be hooked onto the frame. After performing Step 1 below, unfold the Dome™ top and clip the four corner attachment hooks into the holes located just below the corner caps on each leg (See Illustration 1a). Then, clip the two side attachment J hooks over black spacer glide, located at the top of the center truss diamond on each side (See Illustration 1b). Continue with steps 2 - 7.




1a.

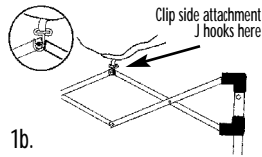


1b.

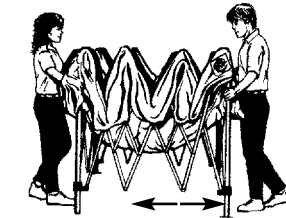


1. Place E-Z UP® in center of area to be sheltered. With partner on opposite side, grasp two outer legs, slightly lift off ground and step backwards, stopping at full arms' length.

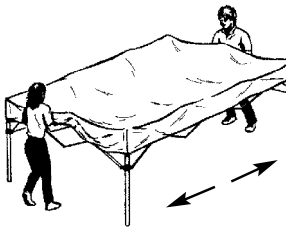



2. Grasp short end (8' length) at the top and bottom of the diamond (shown), on opposite sides. Lift up and push hands together while stepping backwards until shelter is fully opened. Be careful not to pinch fingers or pull backwards too hard as trusses will bend.

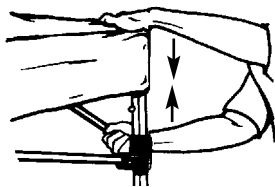


3. Engage auto slider at each corner by pushing up on slider with one hand while pushing down on top of leg with other hand. Snap button will engage in hole. Repeat step on remaining legs.

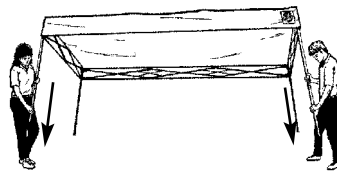


4. Lift two adjacent outer legs 1" and lower inner legs until snap button locks.

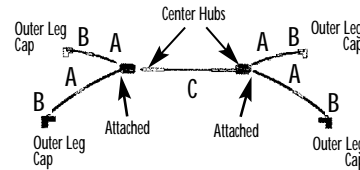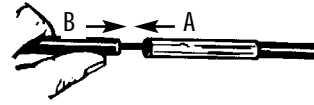



5. Please refer to the diagram below for the following instructions: Remove flex rod from retaining clips. Connect parts together as shown. Place all sets firmly in outer leg caps. Connect center rod to the center hubs and connect side rods to both center hubs.

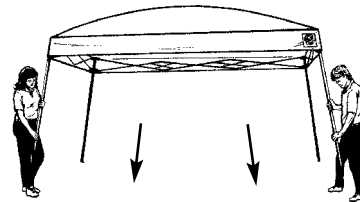


7. Lift up the remaining two outer legs and pull out inner legs until snap button locks. Use stakes to secure in windy conditions.

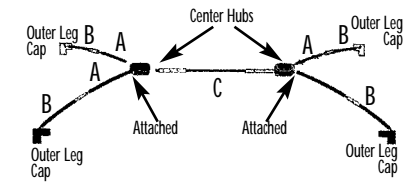


2. Disconnect part C (center rod) from the center hub and disconnect parts A & B (side rods) from the center hubs. Disconnect all A & B sets from the outer leg caps. Before folding part C (center rod), disconnect parts A & B, fold and clip to truss. Fold part C (center rod) and clip the furthest rod to truss. (The center rod has two additional clips to prevent hanging parts.) See illustration below.

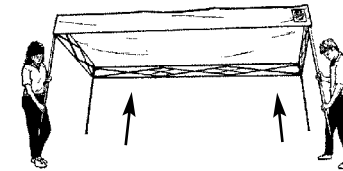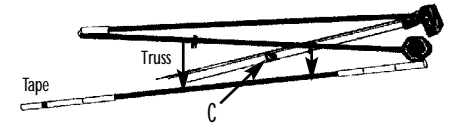


3. Lower remaining legs, by telescoping inner legs into outer legs.

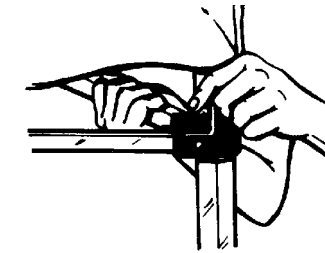

4. Release auto slider at each corner by first lifting hem of top. With one hand push up on truss near slider, depress snap button. **Note:** It is much easier to depress the snap button when the shelter weight has been removed from the snap button.

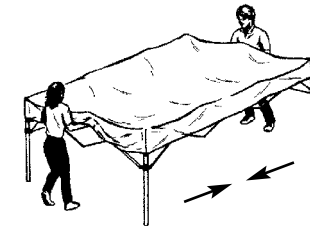


5. Grasp top of diamond on opposite sides and slightly lift up. Shake shelter a little, pulling hands apart, while stepping towards partner until unit is 3/4 closed. Be sure to keep the fabric top off of the ground surface.

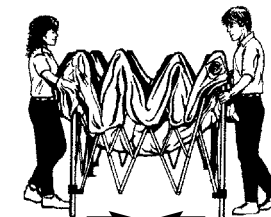

6. Grasp two outer legs, push together until fully closed. Be careful not to pinch fingers! Do not push hard. Put cover bag over shelter.

How To Take Down

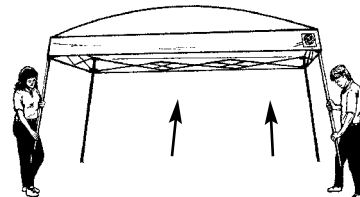

1. With partner, lift two adjacent outer legs 1", depress snap button, telescope inner legs up into outer legs.